

雙刀波動開關 Double-poles Rocker Switch

雙刀帶燈波動開關 Double-poles Illuminated Rocker Switch


http://www.bomin.com.tw



RoHS

型號說明 Ordering Information

IRS-201-1A3D-R/B

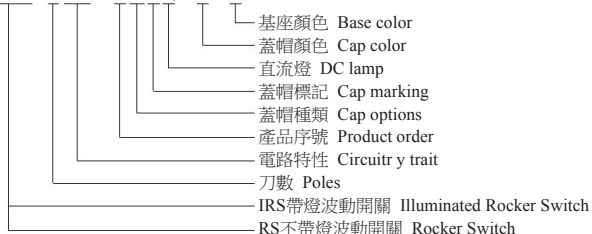

技術特性 Specification

1. 規格 Rating: 20A 125VAC; 15A 250VAC; 35A 12VDC
2. 接觸電阻 Contact Resistance: 35mΩ max
3. 絕緣電阻 Insulation Resistance: 500VDC 100MΩ min
4. 耐電壓 Dielectric Strength: 1500VAC, 1Minute
5. 操作溫度 Operating Temperature: -25°C ~ +85°C
6. 電氣壽命 Electrical Life: 10,000 Cycles

電路特性 Circuitry trait


01	ON	—	OFF
02	ON	—	ON
11	(ON)	—	OFF
03	ON	OFF	ON

(): 回彈指示 Indicates Momentary


蓋帽顏色 Cap color 基座顏色 Base color 防水罩 Water proof cap

黑 Black (B)
 白 White (W)
 紅 Red (R)
 黃 Yellow (Y)
 綠 Green (G)
 藍 Blue (BL)
 桔黃 Orange (O)
 灰 Gray (GR)


黑 Black (B)
 白 White (W)
 灰 Gray (GR)

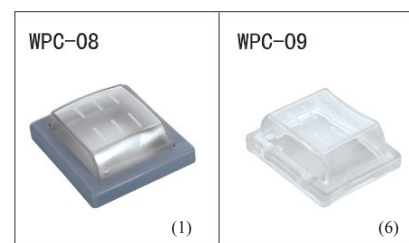

蓋帽種類 Cap options

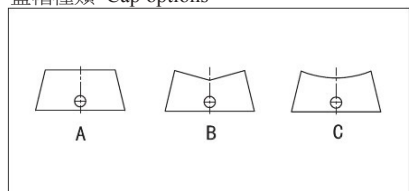


蓋帽標記 Cap marking

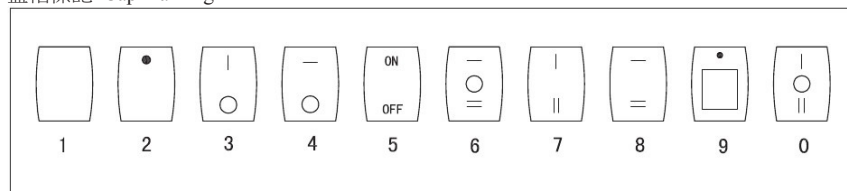

IRS-201-1A ON-OFF

RS-201-1A ON-OFF



DPST 4P

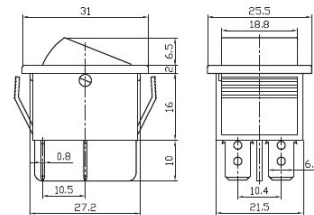

IRS-201-1B ON-OFF

RS-201-1B ON-OFF



DPST 4P

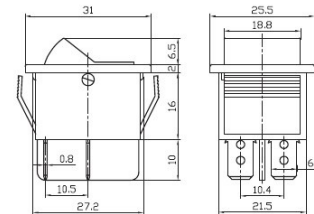



















IRS-201-1C ON-OFF

RS-201-1C ON-OFF

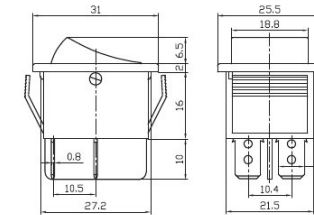DPST 4P









雙刀波動開關 Double-poles Rocker Switch
 雙刀帶燈波動開關 Double -pole s Illuminated Rocker Switch

	<p>IRS-202-1A ON-ON IRS-203-1A ON-OFF-ON RS-202-1A ON-ON RS-203-1A ON-OFF-ON DPDT 6P</p>			
	<p>IRS-202-1C ON-ON IRS-203-1C ON-OFF-ON RS-202-1C ON-ON RS-203-1C ON-OFF-ON DPDT 6P</p>			
	<p>IRS-201-2C ON-OFF RS-201-2C ON-OFF DPST 4P</p>			
	<p>IRS-202-2A ON-ON RS-202-2A ON-ON DPDT 6P</p>			
	<p>IRS-202-2B ON-ON RS-202-2B ON-ON DPDT 6P</p>			
	<p>IRS-202-2C ON-ON RS-202-2C ON-ON DPDT 6P</p>			
	<p>IRS-201-3A ON-OFF RS-201-3A ON-OFF DPST 4P</p>			

雙刀波動開關 Double-poles Rocker Switch

雙刀帶燈波動開關 Double -pole s Illuminated Rocker Switch

	<p>IRS-202-3A ON-ON RS-202-3A ON-ON DPDT 6P</p>	
	<p>IRS-202-3C ON-ON RS-202-3C ON-ON DPDT 6P</p>	
	<p>RS-201-4C ON-OFF DPST 4P</p>	
	<p>RS-202-4C ON-ON RS-203-4C ON-OFF-ON RS-223-4C (ON)-OFF-(ON) DPDT 6P</p>	
	<p>RS-203-5C ON-OFF-ON DPDT 6P RS-2032-5C ON-ON-ON DP3T 5P 6A 125VAC;3A 250VAC</p>	
	<p>IRS-202-6C ON-ON RS-202-6C ON-ON 20A 125VAC;16A 250VAC DPDT 6P</p>	

雙刀波動開關 Double-poles Rocker Switch

雙刀帶燈波動開關 Double-pole s Illuminated Rocker Switch

	<p>IRS-201-7A ON-OFF DPST 4P</p>	
	<p>IRS-2101-1A ON-OFF DPST 6P RS-2102-1A ON-ON DPDT 6P</p>	
	<p>IRS-2101-1B ON-OFF DPST 6P RS-2102-1B ON-ON DPDT 6P</p>	
	<p>IRS-2101-1C ON-OFF DPST 6P RS-2102-1C ON-ON DPDT 6P</p>	
	<p>IRS-2101E-1C ON-OFF DPST 6P</p>	