

单刀波动开关 Single-pole Rocker Switch

单刀带灯波动开关 Single-pole Illuminated Rocker Switch

http://www.bomin.com.tw



型号说明 Ordering Information

IRS-101-1A3D-R/B



技术特性 Specification

- 规格 Rating: 20A 125VAC; 15A 250VAC; 35A 12VDC
- 接触电阻 Contact Resistance: 35mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature: -25°C ~ +85°C
- 电气寿命 Electrical Life: 10,000 Cycles

电路特性 Circuitry trait

01	ON	-	OFF
02	ON	-	ON
11	(ON)	-	OFF
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)


(): 回弹指示 Indicates Momentary

盖帽颜色 Cap color 基座颜色 Base color


- | | |
|-----------|------|
| 黑 Black | (B) |
| 白 White | (W) |
| 红 Red | (R) |
| 黄 Yellow | (Y) |
| 绿 Green | (G) |
| 蓝 Blue | (BL) |
| 桔黄 Orange | (O) |
| 灰 Gray | (GR) |

- | | |
|---------|------|
| 黑 Black | (B) |
| 白 White | (W) |
| 灰 Gray | (GR) |


盖帽种类 Cap options

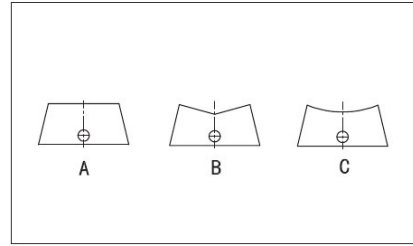


盖帽标记 Cap marking

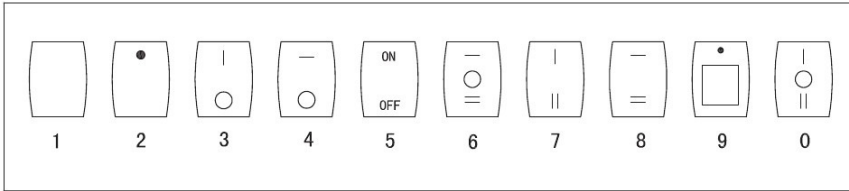



防水罩 Water proof cap

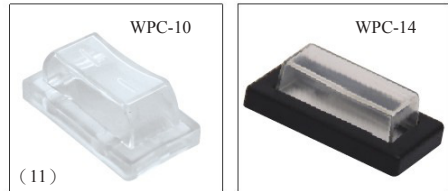


RS-101-1A ON-OFF
SPST 2P

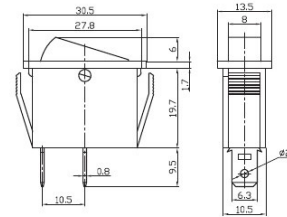

RS-101-1C ON-OFF
RS-111-1C (ON)-OFF
SPST 2P

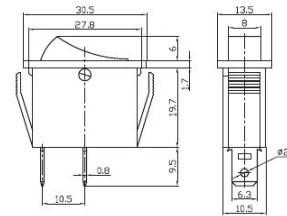

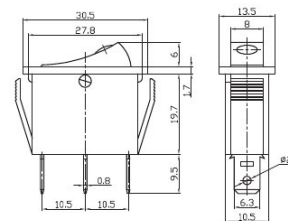




















IRS-1E-2C ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P
























单刀波动开关 Single-pole Rocker Switch

单刀带灯波动开关 Single-pole Illuminated Rocker Switch

	<p>IRS-101-1A ON-OFF SPST 3P RS-102-1A ON-ON SPDT 3P</p>		
	<p>IRS-101-1B ON-OFF SPST 3P RS-102-1B ON-ON SPDT 3P</p>		
	<p>RS-101-2A ON-OFF SPST 2P</p>		
	<p>RS-101-2B ON-OFF SPST 2P</p>		
	<p>RS-101-2C ON-OFF SPST 2P</p>		
	<p>IRS-101-2A ON-OFF SPST 3P RS-102-2A ON-ON SPDT 3P</p>		
	<p>IRS-101E-1C ON-OFF 20A 125VAC; 15A 250VAC SPST 3P</p>		

















单刀波动开关 Single-pole Rocker Switch

单刀带灯波动开关 Single-pole Illuminated Rocker Switch

	<p>IRS-101-2B ON-OFF SPST 3P</p> <p>RS-102-2B ON-ON SPDT 3P</p>		
	<p>IRS-101-2C ON-OFF SPST 3P</p> <p>RS-102-2C ON-ON SPDT 3P</p>		
	<p>RS-101-3A ON-OFF SPST 2P</p>		
	<p>IRS-101-3B ON-OFF SPST 3P</p> <p>RS-102-3B ON-ON SPDT 3P</p> <p>RS-103-3B ON-OFF-ON SPDT 3P</p>		
	<p>IRS-101-3C ON-OFF SPST 3P</p> <p>RS-102-3C ON-ON SPDT 3P</p> <p>RS-103-3C ON-OFF-ON SPDT 3P</p>		
	<p>RS-101-11C ON-OFF SPST 2P</p>		
	<p>IRS-101-11C ON-OFF SPST 3P</p> <p>RS-102-11C ON-ON SPDT 3P</p> <p>RS-103-11C ON-OFF-ON (ON)-OFF-(ON) SPDT 3P</p>		

单刀波动开关 Single-pole Rocker Switch

单刀带灯波动开关 Single-pole Illuminated Rocker Switch

	<p>RS-101-16C ON-OFF SPST 2P</p> <p>RS-102-16C ON-ON RS-103-16C ON-OFF-ON SPDT 3P</p>		
	<p>RS-1-101-2C ON-OFF SPST 2P</p> <p>IRS-1-2C ON-OFF SPST 3P</p> <p>RS-1-102-2C ON-ON SPDT 3P 15A 125VAC; 10A 250VAC</p>		
	<p>IRS-1-3B ON-OFF 15A 125VAC; 10A 250VAC SPST 3P</p>		
	<p>IRS-1-4C ON-OFF 15A 125VAC; 10A 250VAC SPST 3P L=7 ; 10</p>		
	<p>IRS-1-6C ON-OFF 15A 125VAC; 10A 250VAC SPST 3P</p>		
	<p>IRS-1-7A ON-OFF 15A 125VAC; 10A 250VAC SPST 3P L=7 ; 10</p>	